

Server Consolidation for Internet Applications in Virtualized Data Centers

Bo Wang

Department of Computer Science and
Technology, Xi'an Jiaotong University
Xi'an, China 710049 &
SKL Computer Architecture, ICT, CAS
wangbo2012@stu.xjtu.edu.cn

Ying Song

SKL Computer Architecture, ICT, CAS
Beijing, China 100190
songying@ict.ac.cn

Yuzhong sun

SKL Computer Architecture, ICT, CAS
Beijing, China 100190
yuzhongsun@ict.ac.cn

Jun Liu

SPKLSTN Lab, Department of Computer
Science and Technology, Xi'an Jiaotong
University
Xi'an, China 710049
liukeen@mail.xjtu.edu.cn

ABSTRACT

Server consolidation based on virtualization technology simplifies system administration and improves energy efficiency by improving resource utilizations and reducing the physical machine (PM) number in contemporary service-oriented data centers. The elasticity of Internet applications changes the consolidation technologies from addressing virtual machines (VMs) to PMs mapping schemes which must know the VMs statuses, i.e. the number of VMs and the profiling data of each VM, into providing the application-to-VM-to-PM mapping. In this paper, we study on the consolidation of multiple Internet applications, minimizing the number of PMs with required performance. We first model the consolidation providing the application-to-VM-to-PM mapping to minimize the number of PMs as an integer linear programming problem, and then present a heuristic algorithm to solve the problem in polynomial time. Extensive experimental results show that our heuristic algorithm consumes less than 4.3% more resources than the optimal amounts with few overheads. Existing consolidation technologies using the input of the VM statuses output by our heuristic algorithm consume 1.06% more PMs.

Author Keywords

Elasticity; Internet application; server consolidation; virtualization

1. INTRODUCTION

Virtualization technology, such as VM, has been ubiquitously used in cloud computing for resource management. It offers opportunities not only to better isolation and manageability but also to on-demand resource provision for server

consolidation. There are many efforts focusing on virtualization, such as resource virtualization, dynamic deployment of virtual machines (VMs), and on-demand resource allocation among the hosted VMs. These works lead to improvements in the performance of virtualization and resource utilizations. Server consolidation based on VM simplifies system administration and improves energy efficiency by improving resource utilizations and reducing the used physical machine (PM) number.

Server consolidation remaps VMs and PMs when the resources needed by the VMs change to minimize the used PM number or energy consumption. While almost all of the existing works [1–10] addressed the consolidation problem of the applications of which the corresponding VMs are fixed in number at runtime. There are some problems to apply these works to Internet applications, such as e-commerce and web services, whose instances each of which corresponds to exactly one VM can be tuned in number at runtime. The most major one is deciding the number of application instances before consolidation. If the instance number is too large for an application, there would be many underutilized VMs when the load is low, which will increase the used PM number. While if the number is too small, the performance requirement of the application will not be satisfied when the load is high. Thus, the used PM number is affected by not only the resource needed by every VM but also the VM number. So, it should be considered to adjust the number of instances for Internet applications when consolidating them.

Some elasticity managements [11–29] applied one or the combination of vertical scaling (resizing a VM) and horizontal scaling (adding/deleting VMs) to provide the mapping between elastic applications and VMs leased from a public cloud for minimizing the rent cost in the perspective of cloud users. While they do not consider the placement of VMs on PMs, which is critical for improving energy efficiency. A few of elasticity managements [30–32] minimized one or more of

SLA (service level agreement) penalty cost, rented hardware cost, software cost, and action (e.g. load balancing) cost for service providers. While, all of these works did not take into account energy efficiency which is one major goal of efficient operations in virtualized data centers [33]. Except that, they considered that the VMs with same configuration had identical performance for an application, which is not true for heterogeneous PMs.

In this paper, to our best knowledge, we make the first attempt to consolidate multiple Internet application for improving energy efficiency by minimizing PM number from the perspective of a service provider using its owned cloud. We first model the consolidation providing the application-to-VM-to-PM mapping to minimize the number of PMs as an integer linear programming (ILP) problem, and then present a heuristic algorithm to solve the ILP problem in polynomial time. In brief, the contributions of this paper can be summarized as follows:

1. We model the consolidation into an ILP problem which provides the application-to-VM-to-PM mapping minimizing PM number guaranteeing required performance.
2. To solve the ILP problem in polynomial time, we propose a heuristic algorithm. Its basic idea is respectively assigning an available PM and the VM instance type both of which provide the best ratios between performance and resource amount to the application with maximum relative difference between required performance and provided performance and then allocating the rest of this PM's resources to applications in the same way.
3. We conduct extensive experiments using various benchmarks to investigate the effectiveness and efficiency of the proposed heuristic algorithm. The experiments results show that our heuristic algorithm consumes only about 4.3% more resources than the optimal amounts with few overheads and that two existing consolidation technologies using the input of the VM statuses output by our heuristic algorithm consume 1.06% more PMs.

The rest of the paper is organized as follows. Section 2 discusses related work. Section 3 presents our model and heuristic algorithm. Section 4 evaluates our heuristic algorithm and Section 5 concludes this paper.

2. RELATED WORKS

2.1. VM Consolidation

The power consumption of a PM when it is powered on but idle is above 50% of that when it is busy (100% resource utilization) [34]. This motivates server consolidation which increases resource utilizations and energy efficiency by consolidating multiple applications concurrently running on fewer PMs.

Existing server consolidation algorithms [1–10] provided a target VM-to-PM mapping minimizing the PM number or with other objectives, e.g., VM migration cost and consumed energy, and switched the current mapping to the target mapping by VM migration and resource reallocation (vertical

scaling) when some VMs have changes in their required resources. While, to our best knowledge, no existing work has considered consolidating Internet applications whose performance can be tuned by not only vertical scaling but also horizontal scaling for improving energy efficiency. Besides, all of these existing works changed the VM-to-PM mapping by migration leading to non-negligible performance loss and energy overhead [4, 35–37]. In this paper, we consolidate Internet applications taking both vertical and horizontal scaling into account.

2.2. Elasticity Management

In a cloud, customers request resources provided by the providers in the form of VMs each of which has a price. Cloud customers pay for the requested resources. Cloud providers should pay for SLA penalty cost, rented hardware cost, software cost and action cost [31, 32]. To minimize the cost for cloud customers or providers, a plenty of works [11–32] have studied on scaling the application horizontally and/or vertically.


A few works [11–16] studied on the horizontal scaling which tunes the number of VM instances depending to workload variations for an application. Compared to the vertical scaling, horizontal scaling adjusts allocated resources in coarse granularity. Horizontal scaling is supported by most enterprise clouds [38].

Some existing works [17–23] studied on the vertical scaling which reconfigures VMs. Vertical scaling in comparison to horizontal scaling allows to allocate resources with lower overhead in terms of time and cost [20]. While, vertically scaling up a VM can cause costly migration if its host has not enough resource. Vertical scaling is widely used for dynamic consolidation in data centers [18–20].

To more effectively manage the elasticity of applications, some works [24–29] combined horizontal scaling and vertical scaling. These works changed the current VM set into the target VM set which provided the required performance with minimal financial expenditure for customers. These works did not take into account the placement of VMs on PMs.

From the service providers' perspective, a few works [30–32] studied on application-to-VM-to-PM mappings to minimize the cost operating in a per-application level. For example, SmartSLA [32] horizontally and vertically tuned VMs according to the average SLA penalty cost predicted using machine learning to minimize SLA penalty cost, rented hardware cost, and action cost. Jung et al. [30] predicted the behaviors of workloads employing an autoregressive moving averages (ARMA) model and then tuned VMs to minimize SLA penalty. These works did not take advantage of consolidating multiple applications for improving resource utilizations and energy efficiency.

In addition, all of these above elasticity managements assumed that VMs with same configuration had identical performance for applications, which is not true for heterogeneous PMs.

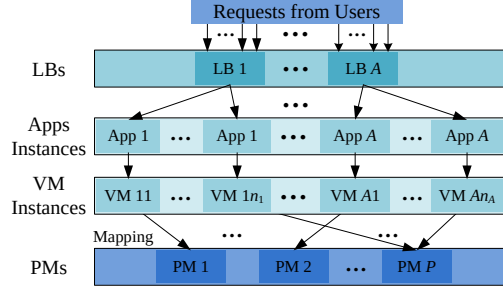

LB: Load Balancer App: Application VM: Virtual Machine PM: Physical Machine

Figure 1. The architecture of a virtualized data center providing Internet applications.

On the contrary, our work studies on the server consolidation for Internet applications in the perspective of service providers. Our work provides application-to-VM-to-PM mapping to minimize the PM number satisfying the required performance.

3. SERVER CONSOLIDATION

In a virtualized data center providing Internet applications, as shown in Fig. 1, a request is distributed to an instance of the corresponding application which has multiple instances each of which is deployed on a VM hosted on a PM, by corresponding load balancer (LB). The designs of LBs are out of scope of this paper. In this paper, we focus on the server consolidation which minimizes PM number guaranteeing required performance for multiple Internet applications.

In this section, we first present the ILP model of the server consolidation (Section 3.1.) and then describe the heuristic algorithm solving the ILP model in polynomial time (Section 3.2.) in details.

3.1. Modelling

The goal of the consolidation is to solve the optimization problem (OP) that is *to minimize the number of used PMs while the provided performance (e.g., throughput) satisfies the requirement for each application*.

We take A applications, R types of resources, P heterogeneous PMs and V VM configurations ($v_1, \dots, v_V$) into account. The available amount of resource j ($j = 1, \dots, R$) on PM k is $r_{j,k}$. The required performance of application i ($i = 1, \dots, S$) is μ_i . For resource j , the configured amount ($l = 1, \dots, V$) is $v_{j,l}$ in VM instance type l . On PM k , the performance provided by a VM instance with type l for application i is $\mu_{i,k,l}$. We define the variables $x_{i,k,l}$, $i = 1, \dots, S$, $k = 1, \dots, P$, $l = 1, \dots, V$, where $x_{i,k,l} = m$ if there are m VM instances hosted on PM k with type l to provide application i , and the binary variables z_k , $k = 1, \dots, P$, where $z_k = 1$ if PM k is used and $z_k = 0$ if not. Table 3.1. summarizes these notations used in this paper.

We formulate the problem of server consolidation as an ILP problem as follows:

Notations	Description
A	The number of Internet applications provided by the hybrid cloud.
R	The number of resource types.
P	The number of PMs in the private cloud.
V	The number of VM instance types.
$r_{j,k}$	The available amount of resource j on PM k .
$v_{j,l}$	The amount of resource j configured in VM instance type l .
μ_i	The required performance of application i .
$\mu_{i,k,l}$	The performance provided by the VM instance with type l on PM k for application i .
$x_{i,k,l}$	The variable representing the number of VM instances hosted on PM k with type l for providing application i .
z_k	The binary variable representing whether PM k is used.
$\hat{\mu}_i$	The provided performance for application i , $\sum_{k=1}^P \sum_{l=1}^V (\mu_{i,k,l} \cdot x_{i,k,l})$.
RPR_i	The ratio between the required performance and provided performance for application i , $\mu_i / \hat{\mu}_i$.
$R2P_{i,j,k,l}$	The ratio between the provided performance and the proportion of resource for application i hosted on PM k with VM instance type l for resource j , $\mu_{i,k,l} \cdot r_{j,k} / v_{j,l}$.
$\bar{N}$	The average number of VMs hosted on a PM.
RD_i	The relative difference between the provided performance and the required performance for application i , $\hat{\mu}_i / \mu_i - 1$.

Table 1. Notations.

$$\text{Minimize } \sum_{k=1}^P z_k, \quad (1)$$

subject to:

$$\sum_{i=1}^A \sum_{l=1}^V (v_{j,l} \cdot x_{i,k,l}) \leq r_{j,k} \cdot z_k, \quad \forall j = 1, \dots, R, \forall k = 1, \dots, P, \quad (2)$$

$$\sum_{k=1}^P \sum_{l=1}^V (\mu_{i,k,l} \cdot x_{i,k,l}) \geq \mu_i, \quad \forall i = 1, \dots, A, \quad (3)$$

$$x_{i,k,l} \geq 0, \text{ and is integer,} \quad \forall i = 1, \dots, A, \forall k = 1, \dots, P, \forall l = 1, \dots, V, \quad (4)$$

$$z_k \in \{0, 1\}, \forall k = 1, \dots, P. \quad (5)$$

The decision variables are $x_{i,k,l}$ ($i = 1, \dots, A$, $k = 1, \dots, P$, $l = 1, \dots, V$) and z_k ($k = 1, \dots, P$). The objective (1) of this model is minimizing the PM number. Constraints (2) ensure that the aggregate amount of any resource required by all applications deployed on any PM does not exceed its available amount. Constraints (3) guarantee that the provided performance of any application satisfies the corresponding requirement. Constraints (4) and (5) represent the integrality and binary requirements, respectively, for decision variables. After solving this model, we achieve the application deployments,

Algorithm 1 The Heuristic Algorithm

$\mathcal{A}$: the set of Internet applications, $|\mathcal{A}|$ 2-tuples: (an application, required performance);
 $\mathcal{P}$: the set of available PMs, $|\mathcal{P}|$ (R+1)-tuples: (an available PM, the available amounts of resource 1, ..., R);
 $\mathcal{V}$: the set of available VM instance types, $|\mathcal{V}|$ (R+2)-tuples: (an available VM instance type, the configured amounts of resource 1, ..., R, price in public cloud);
 $\mathcal{PV}$: the set of the performance of every application running on a VM instance with each type hosted on each PM, $|\mathcal{A}| \cdot |\mathcal{V}| \cdot (|\mathcal{P}| + 1)$ 4-tuples: (a, v, p, the performance), where $a \in \mathcal{A}$, $v \in \mathcal{V}$, and $p \in \mathcal{P}$;
 $\mathcal{M}$: the set of application deployments, $|\mathcal{M}|$ 4-tuples: (a mapping, a, v, p, the provided performance), where $a \in \mathcal{A}$, $v \in \mathcal{V}$, and $p \in \mathcal{P}$;
Input: $\mathcal{A}; \mathcal{P}; \mathcal{V}; \mathcal{PV}$
Output: $\mathcal{M}$

```

1: while ( $\mathcal{P} \neq \emptyset$ )
    $\wedge (\exists a)((a \in \mathcal{A}) \wedge (\sum_{m \in \mathcal{M} \wedge m(2)=a} m(5) < a(2)))$  do
   /*  $m(i)$  is  $i$ th element in tuple  $m$  */
2:    $app \leftarrow a : (a \in \mathcal{A}) \wedge C1(a) \wedge C2(a);$ 
   /*  $C1(a) : a(2) > \sum_{m \in \mathcal{M} \wedge m(2)=a} m(5);$ 
    $C2(a) : \frac{a(2)}{\sum_{m \in \mathcal{M} \wedge m(2)=a} m(5)} =$ 
    $\frac{\max_{a' \in \mathcal{A} \wedge C1(a')}{\sum_{m \in \mathcal{M} \wedge m(2)=a'} m(5)}}{a'(2)}; *$ 
3:    $pm \leftarrow p : (p \in \mathcal{P}) \wedge C3(p) \wedge C4(p);$ 
   /*  $C3(p) : R2P(app, p) = \max_{p' \in \mathcal{P}} R2P(app, p');$ 
    $R2P(a, p) = \frac{\max_{(pv \in \mathcal{PV}) \wedge (pv(1)=a) \wedge (pv(3)=p) \wedge (v \in \mathcal{V}) \wedge (pv(2)=v) \wedge (2 \leq j \leq R+1)}}{pv(4) \cdot p(j)}; *$ 
    $C4(p) : (\forall j \in \{2, \dots, R+1\})(p(j) = \max_{(p' \in \mathcal{P}) \wedge C3(p')} p'(j)); *$ 
4:    $\mathcal{P} \leftarrow \mathcal{P} \setminus pm;$ 
5:   while true do
6:      $app \leftarrow a : (a \in \mathcal{A}) \wedge C1(a) \wedge C2(a);$ 
7:      $vm \leftarrow v : C5(v) \wedge C6(app, v, pm) \wedge C7(app, v, pm);$ 
     /*  $C5(v) : (v \in \mathcal{V}) \wedge ((\forall j \in \{2, \dots, R+1\})(v(j) \leq pm(j)));$ 
      $C6(a, v, p) : pv(4) |_{(pv(1)=a) \wedge (pv(2)=v) \wedge (pv(3)=p)} =$ 
      $\max_{C5(v')} pv(4) |_{(pv(1)=a) \wedge (pv(2)=v') \wedge (pv(3)=p)};$ 
      $C7(a, v, p) :$ 
      $(\forall j \in \{2, \dots, R+1\})(v(j) = \min_{C5(v') \wedge C6(a, v', p)} v'(j)); *$ 
8:     if  $vm = null$  then
9:       goto line 1;
10:    end if
11:     $pv \leftarrow pv' : (pv' \in \mathcal{PV})$ 
      $\wedge (pv'(1) = app) \wedge (pv'(2) = vm) \wedge (pv'(3) = pm);$ 
12:     $\mathcal{M} \leftarrow \mathcal{M} \cup \{(a \text{ new mapping}, pv)\};$ 
13:  end while
14: end while

```

$x_{i,k,l}$ ($i = 1, \dots, A$, $k = 1, \dots, P$, $l = 1, \dots, V$), and the used PMs, z_k ($k = 1, \dots, P$).

3.2. The Heuristic Algorithm

As ILP is NP-hard problem [39], the methods exactly solving the ILP problem, such as enumeration or branch-and-bound, are not feasible to analysing the large scale systems because of their exponential time complexities. Thus, we provide 3MAX heuristic algorithm to find a near-optimal solution with low overhead.

The basic idea of 3MAX is selecting the application with maximum ratio between the required performance and provided

CPU (#cores)	MEMORY	#PM
Intel(R) Xeon(R) CPU E5410 @ 2.33GHz (8)	8GB	10
Quad-Core AMD Opteron(tm) Processor 2378 (8)	8GB	10
Dual-Core AMD Opteron(tm) Processor 2216 (4)	4GB	10

Table 2. The configuration of PMs for hosting VMs.

performance ($RPR_i = \mu_i / \sum_{k=1}^P \sum_{l=1}^V (\mu_{i,k,l} \cdot x_{i,k,l})$) and respectively assigning PM and the VM instance type both of which provide best (maximal) performance to the application. This is why we call it 3MAX. The details, outlined in Algorithm 1, are presented as follows.

Step 1. 3MAX selects a PM with available resources. For each type of resource, there is a ratio ($R2P_{i,j,k,l} = \mu_{i,k,l} \cdot r_{j,k} / v_{j,l}$) between the provided performance and the proportion of resource on a PM for each VM instance type when providing the application with maximum RPR_i . 3MAX selects the PM with the maximum of these ratios (lines 2-4). If there are multiple PMs giving the maximum ratio, 3MAX selects the PM with most amount of available resources from these PMs (C4 in line 3).

Step 2. 3MAX allocates a VM to the application with maximum RPR_i (line 6) on the PM selected in Step 1. 3MAX allocates a VM with the type giving the best performance for this application (line 7). If there are multiple VM instance types giving the best performance, 3MAX selects the VM instance type configured minimal amounts of resources (C7 in line 7).

Step 3. 3MAX repeats Step 2 until there is no available resource on the selected PM for any application (lines 8-10).

Step 4. 3MAX repeats Step 1-3 until the provided performances of all applications are satisfying their respective requirements or there is no available PM (line 1).

The time complexities of the selections (Step 1-2) of application (lines 2 and 6), PM (line 3), and VM instance type (line 7) are $O(A)$, $O(P)$ and $O(V)$, respectively. We assume that a PM hosts $\bar{N}$ VMs on average, then allocating the available resources of a PM (Step 1-3, lines 2-13) is $O(APV\bar{N})$ in time complexity. Thus the time complexity of 3MAX is $O(AP^2V\bar{N})$ at worst.

4. PERFORMANCE EVALUATION

In this section, we introduce our testbed and experiment design. And then we discuss the experimental results.

4.1. Testbed and Experiments Design

In our testbed, the configurations of PMs used as servers for applications are shown in Table 2. Each PM is configured with two 1000Mbps Network Interface Cards (NICs).

We select five applications from four benchmarks for our experiments, as follows.

- **TPC-W** [40] is a transactional web e-Commerce benchmark. The specification defines three different mixes of

web interactions, each varying the ratio of browse to buy activities. We use TPC-W with the options, the TPC-W Shopping Mix and 1.0 think time, to generate workloads. The performance is measured by Web Interactions Per Second (WIPS).

- **Yahoo! Cloud Serving Benchmark (YCSB)** [41] is a performance measurement framework for cloud serving systems. Six core workloads (Workload A-F) are provided. A tool YCSB Client is developed to execute the YCSB benchmarks. We chose Workload A, which has 50 percent reads and 50 percent updates, as the workload generator. One million records are loaded into each database server. Performance is evaluated by throughput (operations per second).
- **Apache Benchmark (ab)** [42] is a tool for benchmarking HTTP server. We design two applications by the benchmark, *abk* and *abm*. They transmit a fixed size file: 1KB, 1MB, which are representative log sizes in current data center [43], to their requests, respectively. Additional, to reduce the disk readings for increasing the performance, files are cached in the buffers in advance. Performance is evaluated by throughput (finished requests per second).
- **SysBench** [44] is a modular, cross-platform and multi-threaded benchmark tool for evaluating operate system (OS) parameters. We use the CPU performance benchmark which is one of the most simple benchmarks in SysBench. In this mode each request consists in calculation of prime numbers up to a specified value (20000 in the paper). Events (i.e. finished requests) per second (EPS) is the performance metric.

The configurations for VM instances have 4, 4, and 5 options for CPU (1-4 virtual CPUs (VCPUs)), memory ((1-4)×0.5GB), and NIC ((1-5)×200Mbps), respectively. Thus there are 80 different VM instance types. We do not consider the disk resource because the disk resource is never the bottleneck in all of our experiments. We assume that SysBench is an Internet application for which its processing results are the data returned to users for the requests.

We use the trace collected from the 1998 World Cup Web site [45] at the five days from May 28, 1998 to June 1, 1998 to generate the workloads of the five applications, respectively, in the following experiments. For an application, we scale the average request number per second within 15 minutes of the trace data by a factor so that the maximal scaled value is equal to the maximum throughput, mt_i , which is two fifths of the value of aggregating throughputs provided by all PMs when running the application on a VM with type provisioning best performance, $mt_i = \frac{2}{5} \sum_{k=1}^P \max_{1 \leq l \leq V} \mu_{i,k,l}$, and set the scaled values as the required throughputs. Our consolidation algorithm, *3MAX*, runs every 15 minutes.

In the following experiments, we pin each VCPU of hosted VMs on a CPU core because performance loss of virtualization can be reduced by core pinning. On a server, the aggregated number of VCPUs of all hosted VM is not larger than the number of CPU cores to avoid the additional overhead of overcommitment.

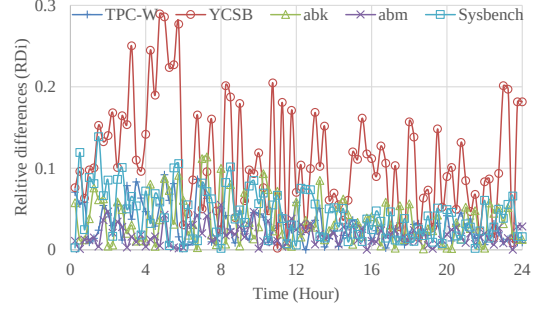


Figure 2. The performance of our consolidation algorithm.

Next, we first evaluate the performance of our heuristic algorithm on the accuracy (Section 4.2.), minimizing PM number (Section 4.3.) and scalability (Section 4.4.), and then experimentally study on the sensitivity of our algorithm on the accuracy of workload evaluations (Section 4.5.).

4.2. Accuracy

We measured the performance of *3MAX* using the relative differences between the total throughputs ($\hat{\mu}_i$) achieved by *3MAX* and the required throughputs (μ_i), $RD_i = (\hat{\mu}_i - \mu_i)/\mu_i$, $i = 1, \dots, A$, and the overall relative difference, $ORD = \frac{1}{A} \sum_{i=1}^A (\sum_t |RD_i|/t)$, where t represents the experiment time intervals. The closer to 0 RD_i and ORD are, the less resources are wasted and thus the better our algorithm performance is, when $RD_i \geq 0$, $i = 1, \dots, A$. $RD_i < 0$ indicates that the required performance is not satisfied for application i .

Figure 2 shows the relative differences of applications, provided by our consolidation algorithm. As shown in this figure, RD_i , $i = 1, \dots, A$ are all close to 0, which means that our consolidation algorithm always has a high accuracy all the time. RD_i , $i = 1, \dots, A$ are always slightly larger than 0, which means that the performance achieved by the consolidation is always satisfying the required performance, guaranteed by the termination condition that all required performances of applications are satisfied (line 1 in Algorithm 1). The ORD is about 0.043, i.e., using our consolidation algorithm consumes only about 4.3% more resources than the optimal amounts.

4.3. Performance in Minimizing PM Number

In this section, we experimentally study on the performance of *3MAX* in minimizing PM number by two existing consolidation algorithms. We respectively run these consolidation algorithms with the VM statuses output by *3MAX*. If the PM number is not reduced by these algorithms, then PM number is minimized by *3MAX* in practice is proved. These two consolidation algorithms respectively are First Fit Decreasing (FFD) [5] and Least Loaded (LL) [46]. The commonly used FFD packing algorithm places the largest VM on the first physical server on which it will fit. If there is no such server, the VM is placed in a new empty server. Least loaded (LL) algorithm [46] assigns the current VM to the used PM with least-load or a new server when there is no room for the VM in the used PMs. When running these algorithms in our


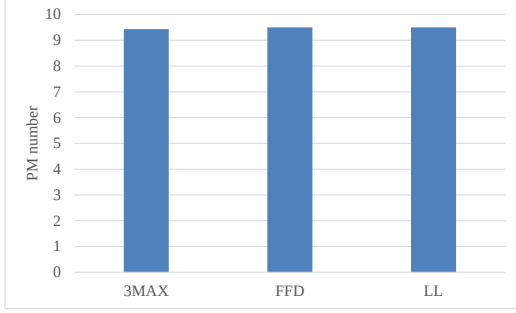


Figure 3. The average PM numbers consumed by various consolidation algorithms.

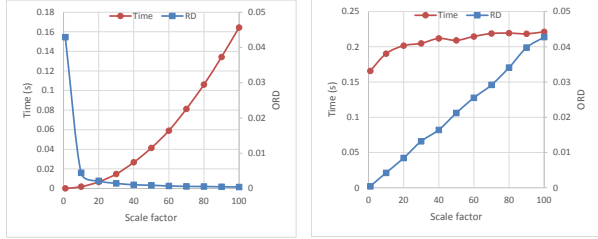

(a) Scalability in PM number (b) Scalability in application number

Figure 4. Scalability of 3MAX in the numbers of PMs and applications.

experiment, we sort the PMs by the amount of resources in descending order in advance.

The results are presented in Fig. 3. From Fig. 3, we can see that FFD and LL have the same performance, consuming 9.5 PMs on average. 3MAX consumes about 9.4 PMs whose number is less than that consumed by FFD and LL, on average. That is to say, these two consolidation technologies need about 1.06% more PMs. Thus, after deploying VMs whose placement is output by 3MAX, the PM number could not be reduced by these consolidations.

4.4. Scalability

In this section, we evaluate the scalability of 3MAX in consumed CPU time and ORD. We first scale the PM number by a factor (f_{PM}) ranging from 1 to 100 to examine the scalability as the PM number increases, and then scale the application number in the same way (f_{APP}) with 3000 PMs to study on the scalability as the number of applications increases. For example, 3MAX consolidating 5 applications on 30 PMs when $f_{PM} = 1$, same as the original system decreased in Section 4.1., and consolidating 5 applications on 3000 PMs when $f_{PM} = 100$. We scale the required throughputs of applications in original system by the factor, the ratio of the numbers of PMs and applications, and set them as corresponding required throughputs in the scaled system. We use the average application performance measured in the original system as that in the scaled systems. The results of running on a Quad-Core AMD Opteron(tm) Processor 2378 core are respectively shown in Fig. 4.

Figures 4a and 4b show a pattern of ORD change, ORD decreases with increasing the workloads of applications. The

reasons are as follows. We consider that the resources are allocated to the VMs on a PM in a discrete way, such as CPU is allocated in a granularity of cores, as done in most of clouds, such as EC2 [38] and OpenStack [47]. The absolute difference between provided performance and required performance is less than the performance provided by a VM with minimal resources using 3MAX. Therefore, the relative difference is decrease with increasing the workload for an application.

As shown in Fig. 4a, the time consumed by 3MAX increases quadratically with the PM number, which is consistent with the analysis in Section 3.2.. As the application number increases, the consumed time, as shown in Fig. 4b, increases slightly because the consumed time depends largely on the PM number due to that the number of applications are much less than that of PMs. Our algorithm can make a decision only about 0.22 seconds which is much less than the decision-making periods (tens or hundreds of seconds) in most of clouds, even in the case of consolidating 500 applications on 3000 PMs.

4.5. Sensitivity

In this section, we experimentally study on the impact of the accuracy of workload evaluation on the accuracy and fluctuation of our consolidation algorithm. We use two workload evaluation methods, χ^2 and F . These methods first test whether the workload of an application is changed by χ^2 -test [48] and F -test [48], respectively, using the data of current time window containing the time intervals of last requests, and evaluate the workload as the average value within current time window if the workload is tested to be changed. We set the size of time windows and the level of significance of tests as 1000 and 0.01, respectively.

As F -test has the assumption that the time intervals of requests follow exponential distribution [48], we generate workloads for evaluating workload evaluation methods and their impact on our consolidation algorithm as follows. We first generate 100 random numbers and realignment them as 20 combinations each of which contains 5 numbers respectively set as the workloads of the five applications. Then, we sample the exponential distributions with means of the generated 100 random numbers and take the samples as the input of evaluation methods. We set that each combination lasts 100 seconds.

The accuracy of workload evaluation is evaluated by the overall relative difference between the estimated workload $\hat{\lambda}$ and the real workload λ , $ORD = \sum_t (|\hat{\lambda} - \lambda|/\lambda)/t$. The closer to 0 ORD is, the more accuracy an evaluation method is. Figure 5 shows the overall relative differences of these two evaluation methods and our consolidation algorithm respective using the workloads evaluated by these two methods.

As shown in Fig. 5, ORDs of χ^2 and F are respectively 0.027 and 0.041, which degrade 0.043 of the ORD of 3MAX into 0.0674 and 0.0662, respectively, i.e., these workload evaluation methods have only a little influence on the accuracy of our consolidation algorithm.

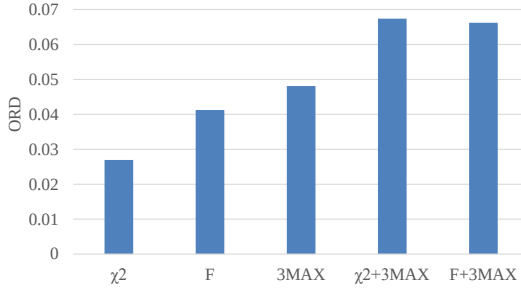


Figure 5. The impact of the workload evaluation methods on 3MAX.

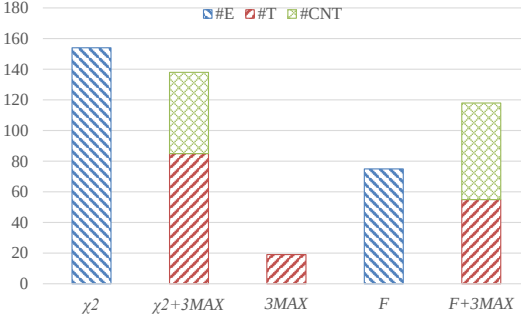


Figure 6. The numbers of evaluated workload changes (#E), application deployment changes (#T), and consolidations without changing deployment (#CNT).

The workloads of the five applications change 19 times, while these two evaluation methods respectively change the evaluated workloads 154 and 75 times, all of which are much more than the actual value, as shown in Fig. 6. This is because the workloads would be re-evaluated even when only one workload are judged to change by the test, which dramatically increases the fluctuations of the evaluation methods. Our consolidation algorithm reduces the fluctuations in two ways. The first is that two combinations of the workloads which have a small difference may correspond to a same application deployment, which reduces the number of application deployment changes. The second is that the current deployment may still satisfy the requirement when the evaluated workloads have small changes, which reduces the number of consolidations. Thus the numbers of application deployment changes, 85 and 55, shown in Fig. 6, are only about half of the numbers of evaluated workload changes, respectively.

3MAX alleviates fluctuations of evaluation methods while does not eliminates them. The deployment change numbers of χ^2+3MAX and $F+3MAX$ are more than that of 3MAX, as shown in Fig. 6. Thus, more accuracy of workload evaluation method helps 3MAX to be more practical.

5. CONCLUSION

In this paper, to our best knowledge, we make the first attempt to study on consolidating multiple Internet applications in virtualized data centers. We model the consolidation into a ILP problem providing a three-tiered mapping, application-to-VM-to-PM, to minimize the PM number satisfied the required performances of applications. To solve the ILP problem in polynomial time, we propose a heuristic algorithm.

Extensive experiments have been conducted to study on the effectiveness and efficiency of our heuristic algorithm. The experiments results show high accuracy of our heuristic algorithm having little sensitivity to the accuracies of workload evaluation methods with good scalability.

ACKNOWLEDGMENT

The authors are grateful to the anonymous reviewers' comments. This work was supported in part by the project of NSFC under grants 61202060, 912183001, 61173112 and 61221062, the National High-Tech Research and Development Program (863) of China under grant 2013AA01A212.

REFERENCES

1. Ligang He, Deqing Zou, Zhang Zhang, Chao Chen, Hai Jin, and Stephen A. Jarvis. Developing resource consolidation frameworks for moldable virtual machines in clouds. *Future Generation Computer Systems*, 32(0):69 – 81, 2014.
2. Gergő Lovász, Florian Niedermeier, and Hermann de Meer. Performance tradeoffs of energy-aware virtual machine consolidation. *Cluster Computing*, 16(3):481–496, 2013.
3. Hao Lin, Xin Qi, Shuo Yang, and S. Midkiff. Workload-Driven VM Consolidation in Cloud Data Centers. In *Parallel and Distributed Processing Symposium (IPDPS)*, 2015 *IEEE International*, pages 207–216, May 2015.
4. Fei Xu, Fangming Liu, Linghui Liu, Hai Jin, Bo Li, and Baochun Li. iAware: Making Live Migration of Virtual Machines Interference-Aware in the Cloud. *IEEE Transactions on Computers*, 63(12):3012–3025, 2014.
5. Akshat Verma, Puneet Ahuja, and Anindya Neogi. pMapper: Power and Migration Cost Aware Application Placement in Virtualized Systems. In *Middleware 2008*, pages 243–264, 2008.
6. Benjamin Speitkamp and Martin Bichler. A Mathematical Programming Approach for Server Consolidation Problems in Virtualized Data Centers. *Services Computing, IEEE Transactions on*, 3(4):266–278, 2010.
7. Ron C. Chiang and H. Howie Huang. Profiling-Based Workload Consolidation and Migration in Virtualized Data Centers. *IEEE Trans. Parallel Distrib. Syst.*, 26(3):878–890, March 2015.
8. Tiago C. Ferreto, Marco A.S. Netto, Rodrigo N. Calheiros, and Csar A.F. De Rose. Server Consolidation with Migration Control for Virtualized Data Centers. *Future Generation Computer Systems*, 27(8):1027 – 1034, 2011.
9. Shekhar Srikantaiah, Aman Kansal, and Feng Zhao. Energy Aware Consolidation for Cloud Computing. In *Proceedings of the 2008 Conference on Power Aware Computing and Systems (HotPower'08)*, 2008.
10. Xiaocheng Liu, Chen Wang, Bing Bing Zhou, Junliang Chen, Ting Yang, and A.Y. Zomaya. Priority-Based Consolidation of Parallel Workloads in the Cloud. *Parallel and Distributed Systems, IEEE Transactions on*, 24(9):1874–1883, Sept 2013.
11. Jing Jiang, Jie Lu, Guangquan Zhang, and Guodong Long. Optimal Cloud Resource Auto-Scaling for Web Applications. In *Cluster, Cloud and Grid Computing (CCGrid)*, 2013 *13th IEEE/ACM International Symposium on*, pages 58–65, May 2013.
12. Junliang Chen, Chen Wang, Bing Bing Zhou, Lei Sun, Young Choon Lee, and Albert Y. Zomaya. Tradeoffs Between Profit and Customer Satisfaction for Service Provisioning in the Cloud. In *HPDC '11*, pages 229–238, New York, NY, USA, 2011. ACM.
13. Emiliano Casalicchio and Luca Silvestri. Mechanisms for SLA provisioning in cloud-based service providers. *Computer Networks*, 57(3):795 – 810, 2013.
14. Zhipiao Liu, Shangguang Wang, Qibo Sun, Hua Zou, and Fangchun Yang. Cost-Aware Cloud Service Request Scheduling for SaaS Providers. *The Computer Journal*, 57(2):291–301, 2014.

15. Linlin Wu, Saurabh Kumar Garg, and Rajkumar Buyya. SLA-based admission control for a Software-as-a-Service provider in Cloud computing environments. *Journal of Computer and System Sciences*, 78(5):1280 – 1299, 2012.
16. Nedeljko Vasić, Dejan Novaković, Svetozar Miućin, Dejan Kostić, and Ricardo Bianchini. DeJaVu: Accelerating Resource Allocation in Virtualized Environments. In *Proceedings of the Seventeenth International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS XVII)*, pages 423–436, New York, NY, USA, 2012. ACM.
17. Amiya K. Maji, Subrata Mitra, Bowen Zhou, Saurabh Bagchi, and Akshat Verma. Mitigating Interference in Cloud Services by Middleware Reconfiguration. In *Middleware '14*, pages 277–288, New York, NY, USA, 2014. ACM.
18. Pradeep Padala, Kai-Yuan Hou, Kang G. Shin, Xiaoyun Zhu, Mustafa Uysal, Zhikui Wang, Sharad Singhal, and Arif Merchant. Automated Control of Multiple Virtualized Resources. In *Proceedings of the 4th ACM European Conference on Computer Systems (EuroSys '09)*, pages 13–26, New York, NY, USA, 2009. ACM.
19. Zhiming Shen, Sethuraman Subbiah, Xiaohui Gu, and John Wilkes. CloudScale: Elastic Resource Scaling for Multi-tenant Cloud Systems. In *Proceedings of the 2Nd ACM Symposium on Cloud Computing (SOCC '11)*, pages 5:1–5:14, New York, NY, USA, 2011. ACM.
20. L. Yazdanov and C. Fetzer. VScaler: Autonomic Virtual Machine Scaling. In *Cloud Computing (CLOUD), 2013 IEEE Sixth International Conference on*, pages 212–219, June 2013.
21. Wesam Dawoud, Ibrahim Takouna, and Christoph Meinel. Elastic Virtual Machine for Fine-Grained Cloud Resource Provisioning. In P. Venkata Krishna, M. Rajasekhara Babu, and Ezendu Ariwa, editors, *Global Trends in Computing and Communication Systems*, volume 269, pages 11–25. Springer Berlin Heidelberg, 2012.
22. P. Lama and Xiaobo Zhou. PERFUME: Power and performance guarantee with fuzzy MIMO control in virtualized servers. In *Quality of Service (IWQoS), 2011 IEEE 19th International Workshop on*, pages 1–9, June 2011.
23. Pengcheng Xiong, Zhikui Wang, S. Malkowski, Qingyang Wang, D. Jayasinghe, and C. Pu. Economical and Robust Provisioning of N-Tier Cloud Workloads: A Multi-level Control Approach. In *Distributed Computing Systems (ICDCS), 2011 31st International Conference on*, pages 571–580, June 2011.
24. Rui Han, Moustafa M. Ghanem, Li Guo, Yike Guo, and Michelle Osmond. Enabling cost-aware and adaptive elasticity of multi-tier cloud applications. *Future Generation Computer Systems*, 32(0):82 – 98, 2014.
25. Upendra Sharma, Prashant Shenoy, Sambit Sahu, and Anees Shaikh. A Cost-Aware Elasticity Provisioning System for the Cloud. In *Proceedings of the 2011 31st International Conference on Distributed Computing Systems (ICDCS '11)*, pages 559–570, Washington, DC, USA, 2011.
26. Mina Sedaghat, Francisco Hernandez-Rodriguez, and Erik Elmroth. A Virtual Machine Re-packing Approach to the Horizontal vs. Vertical Elasticity Trade-off for Cloud Autoscaling. In *Proceedings of the 2013 ACM Cloud and Autonomic Computing Conference (CAC '13)*, pages 6:1–6:10, New York, NY, USA, 2013. ACM.
27. S. Dutta, S. Gera, Akshat Verma, and B. Viswanathan. SmartScale: Automatic application scaling in enterprise clouds. In *Cloud Computing (CLOUD), 2012 IEEE 5th International Conference on*, pages 221–228, June 2012.
28. Miguel Caballer, A García, Germán Moltó, and Carlos de Alfonso. Towards SLA-driven management of cloud infrastructures to elastically execute scientific applications. In *6th Iberian Grid Infrastructure Conference (IberGrid)*, pages 207–218, 2012.
29. Chien-Yu Liu, Meng-Ru Shie, Yi-Fang Lee, Yu-Chun Lin, and Kuan-Chou Lai. Vertical/Horizontal Resource Scaling Mechanism for Federated Clouds. In *Information Science and Applications (ICISA), 2014 International Conference on*, pages 1–4, May 2014.
30. Gueyoung Jung, Kaustubh R. Joshi, Matti A. Hiltunen, Richard D. Schlichting, and Calton Pu. A Cost-Sensitive Adaptation Engine for Server Consolidation of Multitier Applications. In Jean M. Bacon and Brian F. Cooper, editors, *Middleware 2009*, volume 5896, pages 163–183, 2009.
31. Wenting Wang, Haopeng Chen, and Xi Chen. An Availability-Aware Virtual Machine Placement Approach for Dynamic Scaling of Cloud Applications. In *Ubiquitous Intelligence Computing and 9th International Conference on Autonomic Trusted Computing (UIC/ATC), 2012 9th International Conference on*, pages 509–516, Sept 2012.
32. Pengcheng Xiong, Yun Chi, Shenghuo Zhu, Hyun Jin Moon, C. Pu, and H. Hacgumus. SmartSLA: Cost-Sensitive Management of Virtualized Resources for CPU-Bound Database Services. *Parallel and Distributed Systems, IEEE Transactions on*, 26(5):1441–1451, May 2015.
33. U Hoelzle and L Barroso. The datacenter as a computer. *Morgan and Claypool*, 2009.
34. L.A. Barroso and U. Holzle. The Case for Energy-Proportional Computing. *Computer*, 40(12):33–37, Dec 2007.
35. A. Strunk and W. Dargie. Does Live Migration of Virtual Machines Cost Energy? In *Advanced Information Networking and Applications (AINA), 2013 IEEE 27th International Conference on*, pages 514–521, March 2013.
36. Haikun Liu, Cheng-Zhong Xu, Hai Jin, Jiayu Gong, and Xiaofei Liao. Performance and Energy Modeling for Live Migration of Virtual Machines. In *HPDC '11*, pages 171–182, New York, NY, USA, 2011. ACM.
37. Fei Xu, Fangming Liu, Hai Jin, and A.V. Vasilakos. Managing Performance Overhead of Virtual Machines in Cloud Computing: A Survey, State of the Art, and Future Directions. *Proceedings of the IEEE*, 102(1):11–31, Jan 2014.
38. Amazon Elastic Compute Cloud. <http://aws.amazon.com/ec2/>, 2015.
39. Krasimira Genova and Vassil Guliashki. Linear Integer Programming Methods and Approaches—a Survey. *Journal of Cybernetics and Information Technologies*, 11(1), 2011.
40. H.W. Cain, R. Rajwar, M. Marden, and M.H. Lipasti. An Architectural Evaluation of Java TPC-W. In *HPCA 2001*, pages 229–240, 2001.
41. Brian F. Cooper, Adam Silberstein, Erwin Tam, Raghu Ramakrishnan, and Russell Sears. Benchmarking Cloud Serving Systems with YCSB. In *Proceedings of the 1st ACM Symposium on Cloud Computing, SoCC '10*, pages 143–154, New York, NY, USA, 2010. ACM.
42. ab - Apache HTTP server benchmarking tool. <http://httpd.apache.org/docs/2.2/programs/ab.html>, 2015.
43. Xing Pu, Ling Liu, Yiduo Mei, S. Sivathanu, Younggyun Koh, C. Pu, and Yuanda Cao. Who Is Your Neighbor: Net I/O Performance Interference in Virtualized Clouds. *Services Computing, IEEE Transactions on*, 6(3):314–329, July 2013.
44. SysBench: a System Performance Benchmark. <https://github.com/akopytov/sysbench>, 2015.
45. M. Arlitt and T. Jin. A workload characterization study of the 1998 World Cup Web site. *Network, IEEE*, 14(3):30–37, May 2000.
46. Yasuhiro Ajiro and Atsuhiko Tanaka. Improving packing algorithms for server consolidation. In *Int. CMG Conference*, pages 399–406, 2007.
47. OpenStack. <http://www.openstack.org/>, 2015.
48. Sheldon M. Ross. *Introduction to Probability and Statistics for Engineers and Scientists*, chapter 6–8, pages 207–356. Academic Press, Boston, 5 edition, 2014.